

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
**WO 2004/006433 A1**

(51) International Patent Classification<sup>7</sup>: **H03H 11/18,**  
H03D 7/16, 3/00

(21) International Application Number:  
PCT/IB2003/002496

(22) International Filing Date: 27 June 2003 (27.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
02014792.2 4 July 2002 (04.07.2002) EP

(71) Applicant (for all designated States except US): **KONIN-  
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

Eduard, Ferdinand [NL/DE]; c/o Philips Intellectual  
Property & Standards GmbH, Weissshausstr. 2, 52066  
Aachen (DE). **VAN SINDEREN, Jan** [NL/DE]; c/o  
Philips Intellectual Property & Standards GmbH, Weis-  
shausstr. 2, 52066 Aachen (DE). **TOMBEUR, Antoon,**  
**Marie, Henrie** [BE/DE]; c/o Philips Intellectual Property  
& Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).  
**JEURISSEN, Gerardus, Maria, Dionysius** [NL/DE];  
c/o Philips Intellectual Property & Standards GmbH,  
Weissshausstr. 2, 52066 Aachen (DE). **NOTTEN, Marc,**  
**Godfriedus, Marie** [NL/DE]; c/o Philips Intellectual  
Property & Standards GmbH, Weissshausstr. 2, 52066  
Aachen (DE).

(74) Agent: **VOLMER, Georg**; Philips Intellectual Property &  
Standards GmbH, Weissshausstr. 2, 52066 Aachen (DE).


(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,

(72) Inventors; and

(75) Inventors/Applicants (for US only): **STIKVOORT,**

[Continued on next page]

(54) Title: TUNING ARRANGEMENT

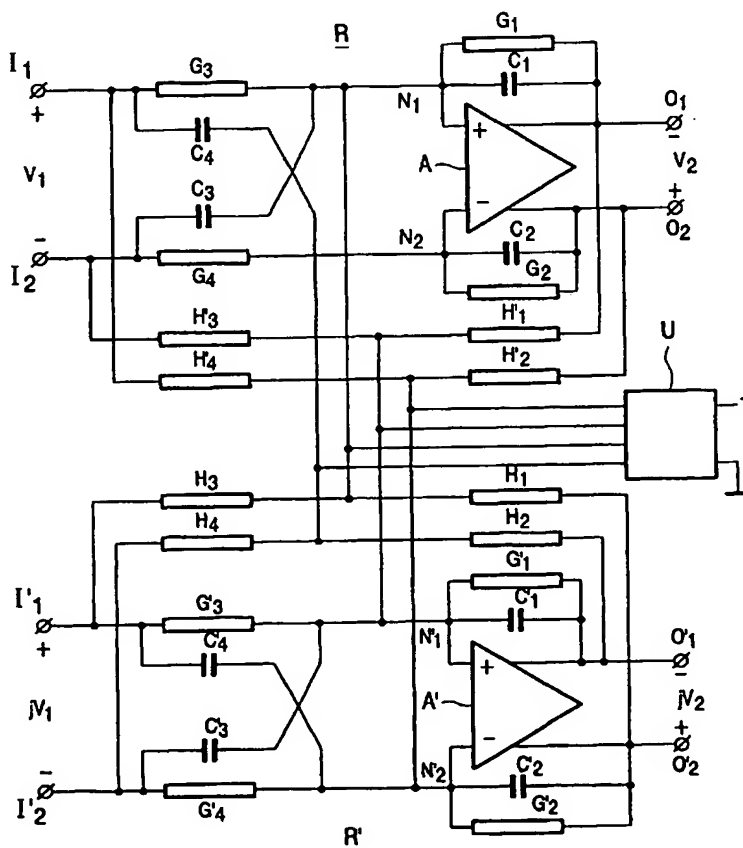

(57) Abstract: A tuning arrangement with a  
polyphase low IF mixer, a polyphase low IF  
filter and a polyphase group delay equalizer.  
The polyphase group delay equalizer has only  
one or more pole-zero pairs in the upper half  
of the complex frequency plane representing  
the transfer function of the equalizer.

WO 2004/006433 A1



GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

JT12 Rec'd PPT/PTO 04 JAN 2005

Tuning arrangement

3 / PPT/PTO 1

5

The invention relates to a tuning arrangement for receiving a plurality of signal channels and for tuning to a specific of said plurality of signal channels, the arrangement comprising a polyphase mixer for mixing said specific signal channel to an intermediate frequency which is lower than twice the bandwidth of the channel, a

10 polyphase IF filter for rejecting the negative frequencies in the mixer output signal and a polyphase group delay equalizer connected to the output of the polyphase IF filter. Such a tuning arrangement, which is proposed in figure 6 of applicant's prior European patent application EP 01201757.0, has the advantage that the tuning arrangement can be

15 components and without the costs involved in adjusting such discrete components.

In most applications of a tuning arrangement of the above kind the group delay has to be kept within certain limits. For instance, in analogue TV a delay results in a horizontal shift in the picture and one pixel shift approximately corresponds with a delay of 80 ns. Therefore it is necessary that the variations in the group delay be kept

20 below 80 ns. This is why the above-described tuning arrangement is equipped with a group delay equalizer.

Usually, prior art group delay equalizers have an all pass transfer function with pole-zero pairs which lie symmetrically with respect to the real axis of the complex frequency plane, with the poles and zeros of the pairs lying symmetrically with respect

25 to the imaginary axis of that plane, whereby the poles are located in the left half of the plane and the zeros in the right half. With other words, with a group delay equalizer with two pole-zero pairs, the two poles are located at  $p = -\sigma \pm j\omega_s$  and the two zeros are located at  $p = \sigma \pm j\omega_s$  where  $\omega_s$  represents the shift along the imaginary axis and  $\sigma$  the shift along the real axis.

30 The present invention makes use of the fact that in case of a group delay

equalizer for a low IF tuning arrangement a substantial improvement can be obtained when in accordance with the invention the tuning arrangement is characterized in that the transfer function of the group delay equalizer has, for the frequency range of interest, only one or more pole-zero pairs alongside of the positive imaginary axis of the complex frequency plane with the pole(s) and the zero(s) of said one or more pairs lying substantially symmetrically with respect to said positive imaginary axis. Therefore according to the invention, in case the equalizer has only one pole-zero pair, the pole lies at  $-\sigma + j\omega_s$  and the zero at  $\sigma + j\omega_s$ .

The invention is based on the following recognition: At the lower frequencies the group delay of the low IF filter is high and decreases with increasing frequency. The equalizer group delay originating from the pole-zero pair(s) in the upper half of the complex frequency plane increases with increasing frequency and is therefore able to at least partly correct or equalize the group delay variations of the IF filter. However, the group delay originating from the pole-zero pair(s) in the lower half of the complex frequency plane decreases with increasing frequency. Therefore such pole-zero pair(s) is not only useless for the equalization process but even counteracts this process. Consequently, it is better to avoid any pole-zero pair in the lower half of the complex frequency plane, what is very well possible with a polyphase group delay equalizer.

A preferred embodiment of a group delay equalizer for use in a tuning arrangement according to the invention is characterized in that said polyphase group delay equalizer comprises an in phase part and a quadrature phase part, each of said parts comprising a balanced operational amplifier, first conductances and first capacitances connected in parallel between each output and the inverting input of the operational amplifier for constituting the pole in the complex frequency plane, second conductances between each input of the part and one of the inputs of the operational amplifier and second capacitances between each input of the part and the other of the inputs of the operational amplifier for constituting the zero in the complex frequency plane and further conductances connecting the inputs of the operational amplifier of each part to the inputs and to the outputs of the other of said parts for shifting the pole and the zero along the positive imaginary axis of the complex frequency plane. In case the amplitude of the transfer function is equal to unity, the said first and second

capacitances are equal, the said first and second conductances are equal and said further conductances are equal. Compared with conventional group delay equalizers the advantages of this kind of group delay equalizers are: less noise contribution, less power consumption and less chip-area or better performance with unchanged chip area.

- 5 Moreover this kind of group delay equalizers is easy to design. The group delay curve as a function of the frequency is a symmetrical "hill" with the shape of the "hill" being determined by said first and second conductances and the position of the "hill" being determined by said further conductances.

- In some cases the group delay to be equalized may be corrected by a
- 10 group delay equalizer having only one pole-zero pair in the upper half of the complex frequency plane. In case the group delay to be equalized is larger or more complicated this group delay may be equalized by an equalizer having two or three pole-zero pairs in the upper half of the complex frequency plane. However, in accordance with another aspect of the invention, a tuning arrangement having such larger or more complicated
- 15 group delay to be equalized may preferably be characterized in that a cascade of group delay equalizers is connected to the output of the polyphase IF filter, each of said group delay equalizers having only one pole-zero pair alongside of the positive imaginary axis of the complex frequency plane.

- The invention will now be described with reference to the accompanying
- 20 drawings. Herein shows

Fig. 1 a block schematic diagram of a tuning arrangement according to the invention,

- 25 Fig. 2a detailed schematic diagram of the group delay equalizer for use in the tuning arrangement of figure 1,

Fig. 3 a pole-zero diagram of the transfer function of the group delay equalizer as depicted in figure 2 and

- Fig. 4 graphs showing the course of the group delay as a function of
- 30 the frequency of different parts of the arrangement of figure 1.

The arrangement of figure 1 is primarily intended for the reception of cable- TV-signals. The arrangement comprises an RF band pass filter 1 which is preferably constituted by a bank of fixed tuned filters, each of which can be switched  
5 into operation by a switching signal that is dependent on the local oscillator tuning. Because the mixing process, to be described hereafter, is performed by multiplying the RF-signal with a symmetrical local oscillator square wave that comprises the uneven harmonics of the local oscillator frequency, it is the primary purpose of the RF band pass filter to suppress the 5<sup>th</sup> harmonic of the RF-signal by about 50 dB. Suppression of  
10 the 3<sup>rd</sup> harmonic is not necessary because the mixing product of the RF 3<sup>rd</sup> harmonic and the local oscillator 3<sup>rd</sup> harmonic is cancelled in the polyphase mixer.

In an RF polyphase filter 2 the output of the RF band pass filter 1 is converted into a polyphase RF signal whose negative frequencies are suppressed and this polyphase RF signal is subsequently mixed with a polyphase balanced local  
15 oscillator signal from a frequency synthesizer 4 in a full polyphase mixer 3. In the mixer 3 the selected channel is converted to a low IF TV-signal of e.g. 1,5 to 6,4 MHz with the picture carrier at 5,7 MHz.

An IF polyphase filter 5 realizes the larger part of the channel selectivity and moreover suppresses the negative frequencies between -8 and -1 MHz to about -60  
20 dB. The IF output of this filter is applied, through a polyphase group delay equalizer 6 to be described hereafter, to an anti aliasing filter 7 whose primary purpose is to suppress the undesired higher frequencies ( $> 8$  MHz) that would otherwise give rise to aliasing distortion in the AD-converter to follow (not shown). From the anti aliasing filter 7 non-polyphase signals are outputted.

25 The polyphase group delay equalizer of figure 2 comprises two identical parts R and R'. The part R has input terminals  $I_1$  and  $I_2$  receiving an input signal  $V_1$  to be equalized and output terminals  $O_1$  and  $O_2$  delivering the equalized output signal  $V_2$ . The part R' receives at its input terminals  $I'_1$  and  $I'_2$  the same but 90° phase shifted input signal  $jV_1$  and delivers at its output terminals  $O'_1$  and  $O'_2$  the 90° phase shifted  
30 output signal  $jV_2$ . The elements of the part R' are indicated by the same reference numerals as those of part R except that they are provided with an accent.

The part R comprises a balanced operational amplifier A. The output terminals of the amplifier are each connected through a parallel arrangement of a conductance  $G_1$ ,  $G_2$  and a capacitance  $C_1$ ,  $C_2$  to the respective inverting input  $N_1$ ,  $N_2$  of the operational amplifier. The input terminals  $I_1$  and  $I_2$  are connected through

5 conductances  $G_3$ ,  $G_4$  to the amplifier inputs  $N_1$ ,  $N_2$  respectively. Moreover these input terminals are cross-connected through capacitances  $C_4$ ,  $C_3$  to the amplifier inputs  $N_2$ ,  $N_1$  respectively.

The conductances  $G_1$  and  $G_2$  have equal values and the same applies to the capacitances  $C_1$  and  $C_2$ . The parallel arrangements  $G_1$ - $C_1$  and  $G_2$ - $C_2$  generate a pole

10 P in the complex frequency plane representing the transfer function  $V_2/V_1$  ( see figure 3). In this plane the quotient  $G_1/C_1 = G_2/C_2 = \sigma$  is the distance of the pole to the imaginary axis. Similarly the conductances  $G_3$  and  $G_4$  have equal values and the capacitances  $C_3$  and  $C_4$  have equal values. The arrangements  $G_3$ - $C_3$  and  $G_4$ - $C_4$  generate

15 a zero Z in the complex frequency plane of  $V_2/V_1$  (see figure 3), however, because of the cross connection of the two capacitances, this zero lies at the right hand side of the imaginary axis while the pole lies at the left hand side of this axis. The quotient  $G_3/C_3 = G_4/C_4$  determines the distance of the zero to the imaginary axis. For the equalizer to

20 have a uniform amplitude characteristic (all pass) it is necessary that the pole and the zero lie symmetrically with respect to the imaginary axis and this requirement implies that  $G_1/C_1 = G_2/C_2 = G_3/C_3 = G_4/C_4 = \sigma$ . The amplitude (gain) of the group delay equalizer equals unity when all four conductances have equal values  $G$  and all four capacitances have equal values  $C$  whereby the quotient  $G/C = \sigma$  determines the distance of the pole and the zero to the imaginary axis.

The arrangement described so far is not able to perform the required

25 equalization, This is because the pole and the zero then both lie on the real axis of the complex frequency plane with the result that the group delay is largest at zero frequency and decreases with increasing frequency, while also the group delay to be equalized is maximal at zero frequency. Therefore the arrangement of figure 2 further comprises four conductances  $H_1$ ,  $H_2$ ,  $H_3$  and  $H_4$  which are connected respectively between the

30 amplifier input  $N_1$  and the part R' output  $O'_2$ , the amplifier input  $N_2$  and the part R' output  $O'_1$ , the amplifier input  $N_1$  and the part R' input  $I'_1$  and between the amplifier

input  $N_2$  and the part R' input  $I'_2$ . The conductances  $H_1$  and  $H_2$  are equal and cause extra currents flowing to the amplifier inputs  $N1$  and  $N2$  respectively and these extra currents cause a shift of the pole  $P$  along the positive imaginary axis over a distance  $H_1/C_1 = H_2/C_2$ . Also the conductances  $H_3$  and  $H_4$  are equal and cause extra currents flowing to the amplifier inputs  $N1$  and  $N2$  respectively. These cause a shift of the zero  $Z$  along the positive imaginary axis of the plane over a distance  $H_3/C_3 = H_4/C_4$ . For the equalizer to retain its all pass character these shifts have to be equal so that  $H_1/C_1 = H_2/C_2 = H_3/C_3 = H_4/C_4 = \omega_s$  (see figure 3). Of course when all four capacitances are equal also all four conductances have to be equal and the shift  $\omega_s = H/C$ .

Figure 4 shows the result of the group delay equalizing by means of the equalizer constructed and dimensioned as described with reference to figures 1, 2 and 3. Curve I shows the group delay of the polyphase IF filter 5 as function of the frequency. The group delay equalizer 6 not only equalizes the group delay of the IF filter 5 but also of the anti aliasing filter 7. Therefore curve II of figure 4 depicts the total group delay of the two units 5 and 7. Vertical stroke lines indicate the limits of the frequency range of the low IF TV signal to be handled. It can be seen from curve II that the group delay of the two units varies between 130 and 290 ns.

Curve III of figure 4 shows the group delay of the polyphase group delay equalizer 6. This curve is a symmetrical "hill" with a top of 170 ns at 5,4 MHz. It may be noted that, with given capacitances, the shape of the "hill" is determined only by  $\sigma$  i.e. by the G-conductances of the equalizer and that the position of the "hill" is determined only by  $\omega_s$  i.e. by the H-conductances of the equalizer.

Curve IV of figure 4 shows the total equalized delay that is the sum of the curves II and III. This delay ranges from 325 ns at 1,5 MHz till 250 ns at 3 MHz, i.e. the delay variation is 75 ns, which is within the limit of 80 ns set before.

As has already been mentioned in the preamble, more than one group delay equalizer can be connected in cascade so that the group delay of the individual equalizers is added. The individual equalizers may have the same or different pole-zero patterns.



## CLAIMS:

1. A tuning arrangement for receiving a plurality of signal channels and for tuning to a specific of said plurality of signal channels, the arrangement comprising a polyphase mixer (3) for mixing said specific signal channel to an intermediate frequency which is lower than twice the bandwidth of the channel, a polyphase IF filter  
5 (5) for rejecting the negative frequencies in the mixer output signal and a polyphase group delay equalizer (6) connected to the output of the polyphase IF filter, characterized in that the transfer function of the group delay equalizer has, for the frequency range of interest, only one or more pole-zero pairs (P-Z) alongside of the positive imaginary axis of the complex frequency plane with the pole(s)  
10 (P) and the zero(s) (Z) of said one or more pairs lying substantially symmetrically with respect to said positive imaginary axis.
2. A tuning arrangement as claimed in claim 1 characterized in that said polyphase group delay equalizer comprises an in phase part  
15 (R) and a quadrature phase part (R'), each of said parts comprising a balanced operational amplifier (A), first conductances ( $G_1$ ,  $G_2$ ) and first capacitances ( $C_1$ ,  $C_2$ ) connected in parallel between each output and the inverting input of the operational amplifier (A) for constituting the pole (P) in the complex frequency plane, second conductances ( $G_3$ ,  $G_4$ ) between each input ( $I_1$ ,  $I_2$ ) of the part and one of the inputs ( $N_1$ ,  
20  $N_2$ ) of the operational amplifier and second capacitances ( $C_3$ ,  $C_4$ ) between each input ( $I_1$ ,  $I_2$ ) of the part and the other of the inputs ( $N_2$ ,  $N_1$ ) of the operational amplifier for constituting the zero in the complex frequency plane and further conductances ( $H_1$  ...  $H_4$ ) connecting the inputs ( $N_1$ ,  $N_2$ ) of the operational amplifier of each part to the inputs ( $I'_1$ ,  $I'_2$ ) and to the outputs ( $O'_1$ ,  $O'_2$ ) of the other of said parts for shifting the pole  
25 and the zero along the positive imaginary axis of the complex frequency plane.

3.           A tuning arrangement as claimed in claim 1  
characterized in that a cascade of group delay equalizers is connected to the output of  
the polyphase IF filter, each of said group delay equalizers having only one pole-zero  
5   pair alongside of the positive imaginary axis of the complex frequency plane.

1/3

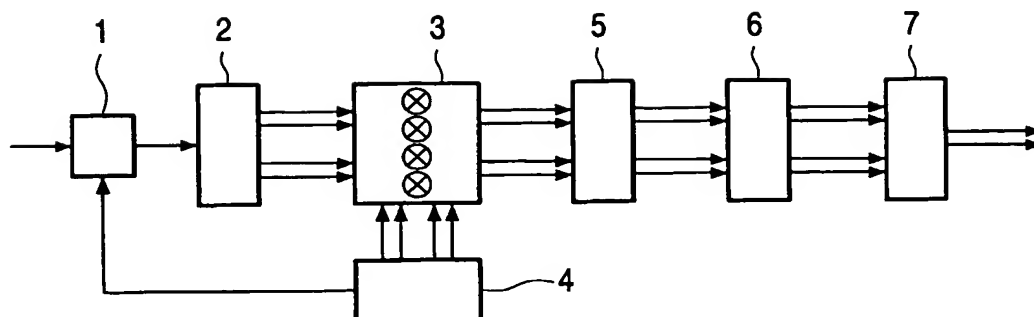


Fig.1

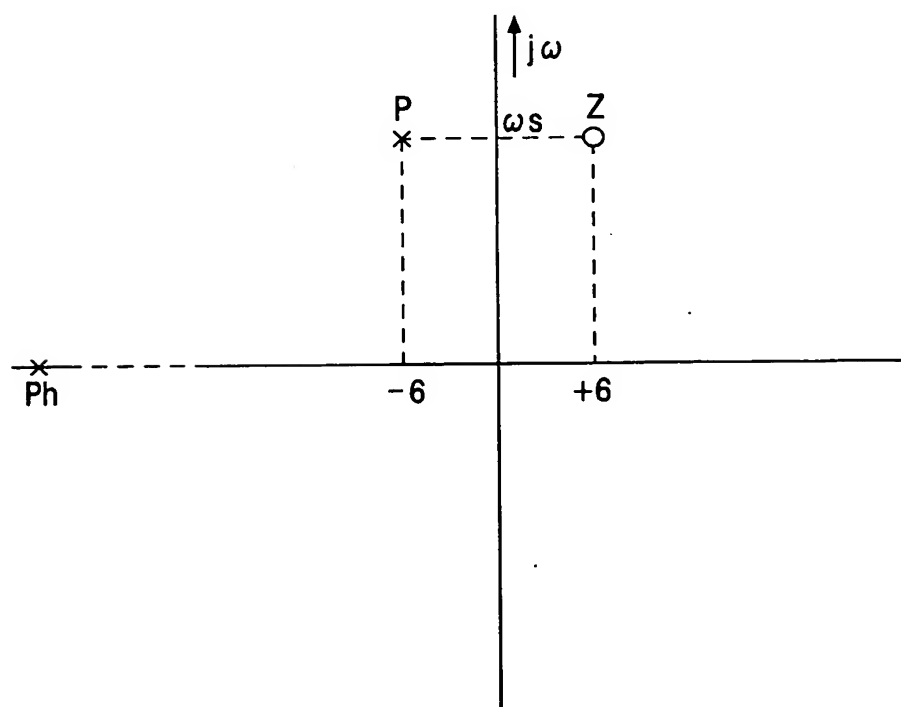


Fig.3

2/3

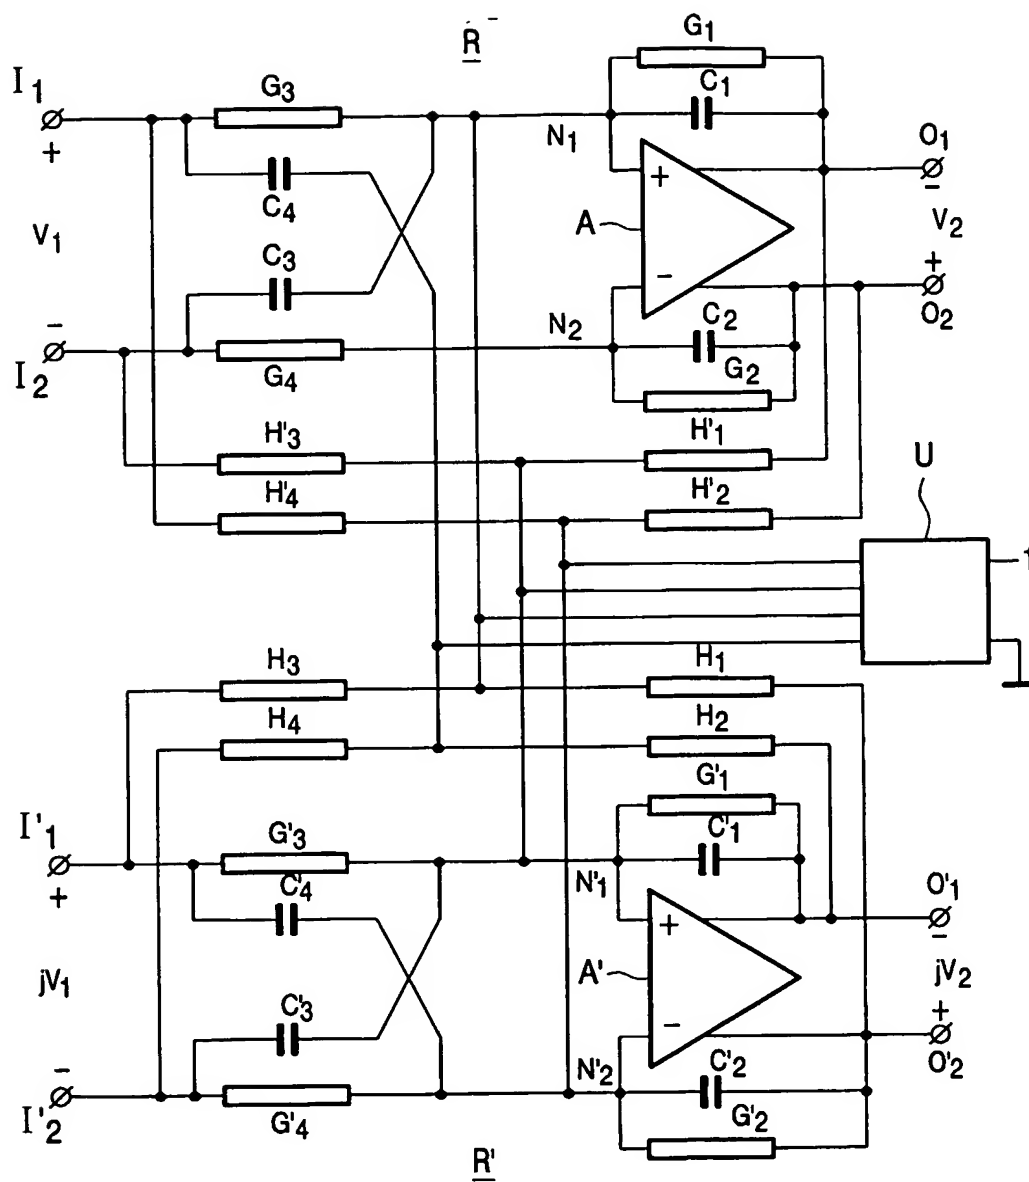


Fig.2

3/3

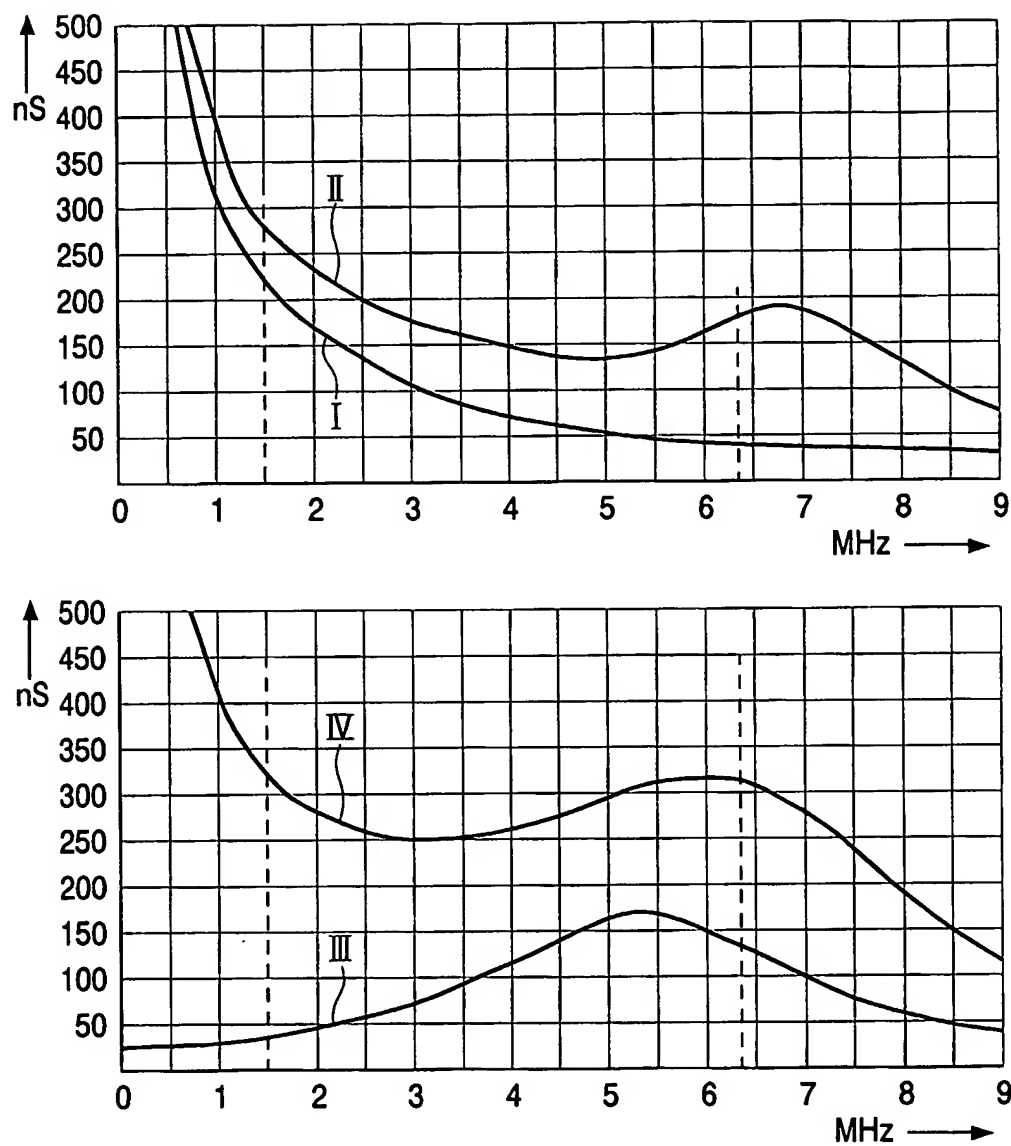


Fig.4

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/03/02496

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H03H11/18 H03D7/16 H03D3/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H03H H03D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A, P	WO 02 093732 A (GIELIS GERARDUS C M ;KUEHN ARIE (NL); NOTTEN MARC G M (NL); JEURIS) 21 November 2002 (2002-11-21) cited in the application abstract; figure 1 ---	1
A	US 3 581 122 A (GAUNT WILMER B JR) 25 May 1971 (1971-05-25) abstract ---	1
A	TOM HORNAK: "Using polyphase filters as image attenuators" RF DESIGN, CARDIFF PUBLISHING CO, ENGLEWOOD, CO, US June 2001 (2001-06), pages 26-34, XP001073227 figure 1 --- -/--	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

16 October 2003

Date of mailing of the international search report

03/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Peeters, M

## INTERNATIONAL SEARCH REPORT

International Application No.

PCT/10-03/02496

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 01 28310 A (ROFOUGARAN MARYAM ;BROADCOM CORP (US); IBRAHIM BRIMA (US); PAN MEN) 26 April 2001 (2001-04-26) figure 10 -----	2

# INTERNATIONAL SEARCH REPORT

International Application No.

PCT/15-03/02496

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 02093732	A	21-11-2002	WO	02093732 A2	21-11-2002
US 3581122	A	25-05-1971	BE	723892 A	16-04-1969
			DE	1808841 A1	06-11-1969
			FR	1591932 A	04-05-1970
			GB	1246686 A	15-09-1971
			NL	6816315 A	20-05-1969
			US	3517223 A	23-06-1970
WO 0128310	A	26-04-2001	AU	1226401 A	30-04-2001
			EP	1224735 A1	24-07-2002
			WO	0128310 A2	26-04-2001
			US	2003042984 A1	06-03-2003
			US	6404293 B1	11-06-2002
			US	6417737 B1	09-07-2002